

## Direct Thermal POS Receipt Printer



# TYSSO®

Insist on the Best

**PRP-058: Approximate 58mm printing width**  
**PRP-080: Approximate 80mm printing width**



PRP-080



PRP-058

## High Speed, Rugged, Easy Use


### FEATURES

- User friendly, easy to install paper roll
- Maximum label width: 57.5mm for PRP-058, and 79.5mm for PRP-080
- Effective print width: 48mm for PRP-058, and 72mm for PRP-080
- Print speed: 52mm/sec. for PRP-058, and 220mm/sec. for PRP-080
- Print density: 384 dots/line for PRP-058, and 576 dots/line for PRP-080
- Print head life: 50km for PRP-058, and 100km for PRP-080
- Halt-on protect function for over heat
- Optional serial or parallel port
- Cash drawer connection port
- ESC/POS print commands set

## SPECIFICATIONS

	<i>PRP-058</i>	<i>PRP-080</i>
<b>Print method</b>	Direct thermal	Direct thermal
<b>Max. label width</b>	57.5mm $\pm$ 0.5mm	79.5mm $\pm$ 0.5mm
<b>Character per line</b>	32 (Font A)	48 (Font A)
<b>Effective print width</b>	48mm	72mm
<b>Print speed</b>	Approx. 52mm/sec. or 14 lines/sec.	220mm/sec.(max.) or 58 lines/sec.
<b>Print head</b>		
Print density	384 dots/line or 8 dots/mm	576 dots/line or 8 dots/mm
Dot space	0.125mm	0.125mm
Print life	50km	100km
Halt-on protection from over-heat	60°C	80°C
<b>Interfaces</b>		
Serial port	Dsub 25 pin female connector, 9600 bps baud-rate, none parity, 8 data bits and 1 stop bit, supports RTS/CTS & XON/XOFF protocol.	Dsub 25 pin female connector, 19200 or 38400 bps baud-rate, none parity, 8 data bits and 1 stop bit, supports RTS/CTS & XON/XOFF protocol
Parallel port	Dsub 25 pin male connector, 8 bits parallel, supports BUSY protocol	36 pin Centronics connector. 8 bits parallel, supports BUSY protocol
Cash drawer port	DC 12V/1A, 6 wires RJ-11 socket	DC 24V/1A, 6 wires RJ-11 socket
<b>Weight</b>	740g ( without cable)	1400g (without cable)
<b>Dimensions</b>	185mm(L) x 114mm(W) x 90mm(H)	190mm(L) x 145mm(W) x 147mm(H)
<b>Environment</b>		
Operating	0° ~ +45°C, 20%RH ~ 80%RH	0° ~ +45°C, 10%RH ~ 90%RH
Storage	-10°C ~ +50°C, 10%RH ~ 90%RH	-10°C ~ +50°C, 10%RH ~ 90%RH
<b>Power supply</b>		
Input	100V AC ~ 240V AC, 50 ~ 60 Hz	100V AC ~ 240V AC, 50 ~ 60 Hz
Output	+8.8V DC/3.5A	+24V DC/3.0A
<b>Print font</b>		
ASCII code	12 x 24 dots, 1.25mm(W) x 3.00mm(H)	12 x 24 dots, 1.25mm(W) x 3.00mm(H)
Graphic font	24 x 24 dots, 3.00mm(W) x 3.00mm(H)	24 x 24 dots, 3.00mm(W) x 3.00mm(H)
<b>Print commands</b>	ESC/POS print commands set	ESC/POS print commands set
<b>Paper adopted</b>		
Paper width	57.5mm $\pm$ 0.5mm	79.5mm $\pm$ 0.5mm
Max. roll diameter	50mm	83mm
Paper thickness	53 ~ 60 g/m <sup>2</sup>	53 ~ 60 g/m <sup>2</sup>
<b>Auto-Cutter</b>	None	Life span: over 1,000,000 cuts

## MODELS INFORMATION

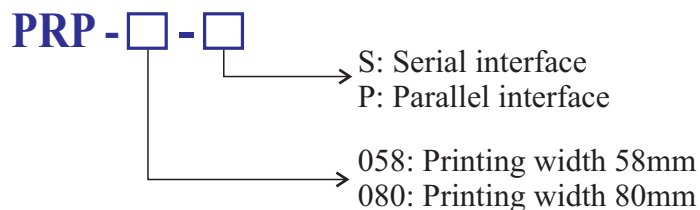

**TYSSO**<sup>®</sup>  
Insist on the Best

Manufacturer

**FAMETECH INC.**

2F, No. 165, Sec. 2, Ta-Tung Rd.,  
Hsi-Chih 221, Taipei Hsien, Taiwan  
Tel : 886-2-8692-6300  
Fax: 886-2-8692-6301  
E-Mail: tyssso@ms6.hinet.net  
URL: <http://www.famotech.com.tw>